

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B01F 13/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/22402</b> (43) International Publication Date: <b>24 August 1995 (24.08.95)</b>
(21) International Application Number: <b>PCT/GB95/00365</b> (22) International Filing Date: <b>22 February 1995 (22.02.95)</b> (30) Priority Data: <b>9403362.8</b> <b>22 February 1994 (22.02.94)</b> <b>GB</b> (71) Applicant (for all designated States except US): <b>SUMMIT MEDICAL LTD. [GB/GB]; Industrial Park, Bourton on the Water, Gloucestershire GL54 2HQ (GB).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>BROWN, Tim [GB/GB]; 85 Habberley Road, Kidderminster, Worcs DY11 5PN (GB). FOSTER, David [GB/GB]; 12 Cabrera Close, Virginia Water, Surrey GU25 4HB (GB).</b> (74) Agent: <b>DAVIES, Christopher, Robert; Frank B. Dehn &amp; Co., 15-19 Kingsway, London WC2B 6UZ (GB).</b>		(81) Designated States: <b>AU, CA, GB, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  <b>Published</b> <i>With international search report.</i>

(54) Title: **BONE CEMENT MIXING APPARATUS**

## (57) Abstract

A bone cement mixing apparatus comprising a mixing chamber (2), a mixing element (4) rotatably mounted in the mixing chamber (2) and drive means (7) for causing rotation of the mixing element (4). In one embodiment, the drive means (7) is a handle axially movable relative to the mixing chamber (2). A gear mechanism between the handle (7) and the mixing element (4) translates axial movement of the handle into rotation of the mixing element. In another embodiment the drive means (7) is carried by a lid assembly (9) of the chamber (2). The lid assembly and drive means are detachable from the chamber and from the mixing element (4) so that the lid assembly and drive means can be reused with a new chamber and mixing element.

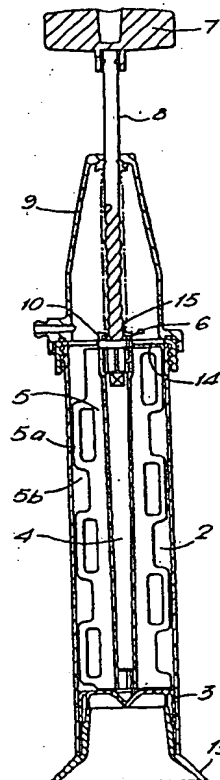

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

Bone Cement Mixing Apparatus

The present invention relates to a device for mixing and delivering orthopaedic bone cement or the like.

5       Orthopaedic bone cement is used throughout the world to secure hip, knee and other metallic prostheses in an appropriate anatomical position. The bone cement is produced by thoroughly mixing together two components, usually methylmethacrylate monomer liquid and  
10   polymethylmethacrylate powder. The mixing is usually carried out using a simple bowl and spatula. The surgeon then removes the required amount of cement and manipulates it by hand before inserting it into a preformed cavity or applying it to a resected bony  
15   surface where the prosthesis is to be positioned. Cement may either be applied by hand or may be put into a syringe and applied thereby. However, this simple mixing method has two major drawbacks.

Firstly, free methylmethacrylate fumes are emitted  
20   from the mixture. It is desirable to remove these fumes, or prevent them from escaping into the atmosphere, since they have an unpleasant odour and may be harmful to operating room personnel. The fumes are known to cause nausea and giddiness and are generally objectionable,  
25   particularly to the nurses who actually carry out the mixing. Recently there has also been concern that long term exposure to these fumes results in a more serious health risk. Current employment law relating to occupational health means medical staff must now be  
30   protected against the exposure to hazardous substances.

Secondly, a very high mixing efficiency is required to produce a homogenous cement material. During the mixing process air is naturally introduced into the mixture since air is inherently existent within the  
35   powder and also in and around the mixing vessel. Air bubbles are also produced by the "boiling off" of monomer which occurs during the mixing process. The introduction of air produces a weak cement and, since the joint must

- 2 -

usually support a heavy load, it is important to reduce the amount of air in the mixture as much as possible in order to improve the mechanical strength of the cement material.

5 In order to eliminate as much air as possible from the mixture mixing is now preferably carried out under vacuum. This considerably reduces the amount of air in the mixture. Mixing in a conventional bowl and spatula system can produce a product with a porosity value of  
10 approximately 20 to 25%. In a vacuum mix, the porosity is often reduced to levels below 5%.

Several devices for mixing the cement in a vacuum are presently available. Some of these are in the form of hand-held mixing bowls. The substances to be mixed  
15 are placed in the bowl to which a vacuum is applied. The substances are mixed by means of a rotating paddle extending into the bowl which is rotated manually by means of a handle extending through the lid of the bowl. In some applications, the use of such a mixing bowl, an  
20 example of which is disclosed in WO 93/10892, is favoured. Many surgeons prefer to "hand pack" the cement. Bowl mixing also tends to be preferred by nurses who are used to the convenience of mixing in this vessel; a bowl is easier to use and it is important that the  
25 nurses feel confident since timing is very crucial and the mixture must be 'right first time'. Many surgeons also tend to prefer bowl mixers because they can easily take samples of the cement from the bowl at any time to determine the progress of polymerisation as it is crucial  
30 that the mixture does not begin to set before it is applied.

However, in some applications it is preferable or necessary to apply the mixed cement to the bone by means of a syringe. Indeed some surgeons, particularly in  
35 Europe, prefer syringe-type application to "hand packing". If the cement is mixed in a bowl, it must then be transferred to a dispensing syringe which can be messy

- 3 -

and time consuming and may expose the mixture to more air entrapment. This problem has been overcome by combining a mixing chamber with a syringe. For example, EP-A-0178658 discloses a device for mixing bone cement comprising a mixing container connected to a feed device. A vacuum source is connected to the feed device for mixing the substances under vacuum. This device has proved to be a very efficient mixing and transfer system and eliminates the need to transfer the mixed cement from the mixing bowl to a syringe.

However, such a device may be inadequate in that 'dead spots', i.e. areas where the components are not sufficiently mixed, occur, particularly at the outer edges of the mixing chamber.

Further, the mixing paddle of EP-A-0178658 is rotated by a rotary electric drive motor. This makes the device costly and space consuming and requires specialist and time-consuming installation. The device is not easily portable and its use is, therefore, not particularly flexible.

US 4,758,096 also discloses a bone cement mixer in which the cement is mixed in the dispensing vessel. In this device, the mixing is effected manually by means of a "masher" plate-type agitator. The masher plate is attached to a shaft attached to a handle. The agitator is movable in the chamber both axially and rotatably to permit mixing of the cement by the user moving the handle vertically and rotatably. However, such a mixing operation is difficult and inefficient and does not result in thorough mixing of the cement, leaving areas of unmixed powder.

The present invention aims to overcome the above-mentioned problems.

According to one aspect of the invention, there is provided a bone cement mixing apparatus comprising a mixing chamber, a mixing element rotatably mounted in said mixing chamber, and drive means for causing rotation of said mixing element, wherein said drive means

- 4 -

comprises a handle axially movable relative to said mixing chamber, and a gear mechanism between said handle and said mixing element such that said gear mechanism translates axial movement of said handle into rotation of  
5 said mixing element.

According to another aspect of the invention, there is provided a method of mixing bone cement in a mixing chamber, by a mixing element rotatably mounted in said chamber containing the material to be mixed; said method  
10 comprising axially moving a drive handle, relative to said chamber, wherein said handle is connected to said mixing element via a gear mechanism, such that axial movement of said handle is translated via said gear mechanism into rotation of said mixing element.

15 The preferred type of gear mechanism is a "barley twist" mechanism wherein a downwards stroke of the handle moves a threaded rod axially through a threaded gear housing in the form of a drive bush coupled to the mixing element inducing a rotational force in a first direction  
20 on the mixing element. On the upward stroke of the handle, the mixing element is caused to rotate in the opposite direction. Rotating the element alternately in different directions during mixing provides very thorough mixing. The "barley twist" mechanism allows this with a  
25 simple push-pull action of the handle rather than the user having to rotate the handle backwards and forwards alternately which can be difficult and tiring, particularly when mixing cement of high viscosity.

Although the present invention may be applied to any  
30 bone cement mixing chamber, it is preferably used in combination with a dispensing syringe. Thus, the cylinder of the syringe forms the body of the mixing chamber and a plunger is slidably mounted at one end of the cylinder for causing ejection of the mixed cement.

35 As discussed above, the quality of the cement is greatly improved if it is mixed under vacuum and, therefore, in a preferred embodiment, the invention comprises means for creating a vacuum within the chamber.

- 5 -

For thorough mixing, the mixing element is preferably in the form of a paddle arrangement mounted on a shaft which in the preferred embodiment includes an axial bore through which the threaded rod of the barley twist gear mechanism can extend. The paddle or paddles extend radially from the shaft and at least one paddle may extend from the shaft to the wall of the mixing chamber so that as it rotates it wipes out the whole of the cement containing part of the interior of the chamber.

To avoid wasting any of the mixed cement, the mixing paddle should preferably be wiped clean before it is removed from the mixing chamber. A hygienic way of doing this, which avoids contamination of the cement is to provide a slot in the chamber through which the mixing paddle extends into the chamber. This slot is of a width substantially equal to the thickness of the mixing paddle so as to wipe any residual cement from the mixing paddle as it is withdrawn through the slot after mixing.

The slot may be formed as an integral part of the cylinder towards the end to which the handle is attached, in which case, after mixing, the cement would be ejected through this slot. Alternatively, the slot could be formed in a separate member, such as a cap or a plate, adapted to be inserted between the cylinder and the lid. The slotted member could then be removed after the mixing paddle has been withdrawn through it, before the cement is ejected.

In mixing bone cement, alternate layers of cement powder and monomer liquid are put into the mixing chamber. Initially the cement is very stiff and a high force is needed to start the mixing. There is then a surface reaction between the powder and liquid phases and once mixing has started the required mixing force drops sharply. The larger the interface area between the layers, the better the surface reaction. Thus, the cylinder should be as wide as possible to maximise the

- 6 -

layer interface area whilst still being comfortable to handle.

In one embodiment, the mixing element, the handle and the gear mechanism are formed as an integral unit in a detachable lid assembly. The lid is adapted to be attached to one end of the cylinder by e.g. matching threaded portions. After mixing, the lid assembly including the mixing assembly comprising the mixing element, the handle and the gear mechanism can be removed from the cylinder, e.g. by unscrewing, and, in the preferred embodiment, can be replaced by a nozzle or the like. The nozzle cooperates with the plunger to eject the mixed cement out through the nozzle when the plunger is pushed into the cylinder. The plunger may be manually operated, e.g. using a hand gun arrangement or, alternatively, a gas powered pressure gun could be used.

In many applications, however, e.g. in hip replacement operations, more than one step is involved and, therefore, several batches of cement need to be mixed. To make the system more economical, the handle and the gear mechanism should preferably be re-usable, whereas the mixing paddle is only used once and then disposed of. Thus, for such applications the drive mechanism should be detachable from the mixing element after use.

According to a third aspect of the invention, there is provided a bone cement mixing apparatus comprising a mixing chamber, a mixing element rotatably mounted in said mixing chamber, and drive means including a handle for causing rotation of said mixing element, wherein said drive means is carried by a lid assembly of the chamber, and wherein the lid assembly and drive means are detachable from the chamber and from the mixing element thereby enabling reuse of the lid assembly and drive means with a different chamber and mixing element if desired.

Air tight seals are preferably provided between the lid assembly and the mixing element, between the lid



- 7. -

assembly and the chamber and the chamber and the stand assembly. In this embodiment the drive bush of the preferred gear mechanism is preferably detachable from the paddle and may conveniently be push fitted into the top of the paddle shaft. A rib and groove locating arrangement is preferred.

When the contents of the chamber have been sufficiently mixed, the lid assembly and drive means can be removed, leaving the paddle inside the chamber. This indicates to the nurse that the next step is to remove the paddle and attach a nozzle for applying the cement. If the paddle is withdrawn through a slit to wipe it clean, it is easier to align the paddle with the slit once the lid assembly has been removed. This makes the device particularly user friendly.

The nozzle cooperates with the plunger to eject the mixed cement out through the nozzle when the plunger is pushed into the cylinder. The plunger may be manually operated, e.g. using a hand gun arrangement or,

alternatively, a gas powered pressure gun could be used.

According to another aspect, the invention provides an orthopaedic bone cement mixing apparatus comprising a cylindrical syringe body defining a mixing chamber, a plunger slidably mounted at one end of the cylinder, a mixing member rotatably mounted in said chamber and drive means for causing rotation of said mixing member, wherein said mixing member includes a blade mounted on and radially extending from a rotatable shaft along the central axis of the cylinder such that rotation of said shaft causes said blade to rotate about the axis of the shaft within the interior of the cylinder, and wherein the blade extends from the shaft to the inner wall of the cylinder and is adapted and arranged so that as the blade rotates it wipes out the whole cement containing part of the interior of the cylinder.

Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, wherein:

- 8 -

Fig. 1 is a cross-sectional view of a mixing apparatus according to the present invention;

Fig. 2 is a more detailed cross-sectional view of the gear mechanism of a mixing apparatus according to one aspect of the invention;

Fig. 3 is a cross-sectional view of a mixing apparatus according to another aspect of the invention; and

Fig 3a, is an enlarged exploded view of the engagement between the mixing paddle and gear mechanism of Fig. 3.

Fig. 4 is a cross-sectional view of a mixing device according to one aspect of the invention, with a nozzle attached and in a cement dispensing position.

Referring to Fig. 1, there is shown a combined bone cement mixing and dispensing syringe. The cylindrical syringe body 1 defines a mixing chamber 2. A plunger 3 for ejecting the mixed cement is slidingly located in one end of the cylinder 1. A mixing element extends into the mixing chamber 2. The mixing element comprises a shaft 4 along the central axis of the cylinder 1 with a number of fixed paddle blades 5 extending radially outwards from the shaft 4. The blades 5 are made of plastic strong enough to resist bending when mixing viscous cement. However, in order to prevent 'dead spots' occurring and to ensure thorough mixing, diametrically opposite blades 5 should have complementary shapes. The shaft 4 is attached to a drive mechanism including a handle 7 and a gear mechanism 6 (shown in more detail in Fig. 2 and discussed further, below). The handle 7 carries a rod 8 which is axially movable by the handle 7. The rod 8 extends axially through the removable lid 9 of the cylinder 1 and passes through a drive bush 10 fixed to the mixing paddle shaft 4 and shown in more detail in Fig. 2. The handle 7 is preferably secured tightly to the rod 8 such that rotation of the handle 7 necessarily results in rotation of the rod and hence the paddle shaft 4. The rod 8 of the preferred embodiment has a barley

- 9 -

twist configuration of square cross-section. The rod 8 passes through the drive bush 10 via a correspondingly dimensioned square aperture or driving lug 11. As the drive handle 7 is pushed, the rod 8 moves axially through this aperture 11 and into the hollow shaft 4 of the mixing member. Thus, as the rod 8 moves axially through the aperture 11, the square shape of the aperture is forced to follow the 'twist' of the rod 8, thus causing the bush 10, and mixing paddle to rotate as the handle 7 and hence the rod 8 are moved axially. Similarly, when the handle 7 is pulled the rod 8 is withdrawn through the aperture 11 in the bush 10 and the mixing member is caused to rotate in the opposite direction. Thus, as the handle is pushed and/or pulled the mixing blades 5 rotate within the mixing chamber about the axis of the shaft 4.

The drive bush 10 is rotatably mounted inside the lid 9 and, in the embodiment of Fig. 1, the shaft 4 of the mixing member is fixedly attached to the drive bush 10.

In the embodiment of Fig. 3, the mixing element is instead detachable from the lid assembly. Thus, the drive bush 10' has a number of locating ribs 100 around its outer periphery (figure 3A). The mixing member has a hollow shaft 4'. The top of the shaft 4' of the mixing member has a number of grooves 200, corresponding to the ribs 100, around its inner periphery. Towards the open end of the shaft 4', the grooves 200 open out to provide a widened entrance for the ribs 100. This enables easy push-fit location of the drive bush 10' in the shaft 4'. As in the first embodiment, the drive bush has an aperture shaped to cooperate with the rod 8 and translate axial movement of the rod into rotation of the mixing element. As shown in Figure 3, the lid carries a downwardly facing funnel shape guide member 201 which helps locate the top of shaft 4' into engagement with the drive bush 10'. An O-ring seal 202 cooperates between the top of shaft 4' and the inner surface of the neck of

- 10 -

guide member 201 so as to prevent air entering the mixing chamber via the drive gear mechanism.

The top end 203 of guide member 201 is fixed into a downwardly projecting annular flange 204 of the lid 9 so as to retain the rotatable drive bush 10' within the lid assembly.

A further O-ring seal 205 is disposed between the lid 9 and cylinder 1.

In the preferred embodiments, the mixing element has two diametrically opposite mixing blades 5 extending radially outwards from the shaft 4. Each blade 5 comprises alternate lobes 5a and spaces 5b along the length of the shaft 4. To ensure thorough mixing, the lobes 5a of one blade 5 correspond to the position of the spaces 5b of the other. Also, the lobes 5a themselves may be solid or aperture. Apertured lobes minimize the amount of material required to form blades which provide sufficiently thorough mixing. Of course any number of blades 5 may be provided and the design of the blades may vary. For example, several blades of different widths could be used.

The mixing chamber 2 is provided by a cylindrical syringe body 1, partially closed at one end. One end is adapted to axially receive a plunger 3. This end is also adapted to be received in stand 13 and may be secured to the stand 13 by corresponding screw threads. A seal 206 provides a seal between the syringe body 1 and stand 13. The other end is preferably provided with an outer thread, adapted to receive a corresponding inner thread of the lid 9 and of a nozzle 12.

In use, the cement materials to be mixed are placed into the mixing chamber 2, which is closed at one end by the plunger 3 or part of a plunger. The inner surface of the plunger 3 is preferably domed to match the inner profile of the lid to minimize waste. The cylinder 1 may then be positioned on the stand 13 or may be hand-held. The lid 9 has an inner thread so that it can be screwed onto the thread at the end of the cylinder 1 with the

- 11 -

shaft 4 and blades 5 extending into the cylinder 1. The cement is then thoroughly mixed by alternately pushing and pulling the handle 7 which causes the blades 5 to rotate about the axis of the shaft 4. Mixing may be carried out under vacuum and a vacuum pump may be attached to a vacuum port in the lid 9.

When the cement has been mixed sufficiently, the mixing member is removed by unscrewing the lid and withdrawing the mixing rod 8 from the paddle shaft. In the preferred embodiments, a slotted cover 14 is provided between the cylinder 1 and the lid 9, with an aperture in the slot, through which the shaft 4 passes. In the embodiment of Fig. 3, the paddle is initially left behind in the cylinder 1 after the rod 8 has been withdrawn. The drive bush 10' is detached from the top of the shaft 4' and removed with the lid assembly. The paddle can then be withdrawn separately through the slot, the slot being of substantially the same width as the thickness of the blades 5 so that any cement remaining on the blades 5 is wiped off. In the first embodiment the paddle is always removed with the handle and lid assembly.

The lid 9 is then replaced by an applicator nozzle 12. The mixed cement is then forced through the nozzle 12 under the action of the plunger 3 to be applied to the appropriate site. Different types of plunger may be used to force the cement out through the nozzle 12 for example, a hand operated gun 16 may be used. However, the preferred embodiment uses a gas powered pressure gun. Fig. 4 shows the apparatus with a nozzle 12 attached in a dispensing position.

The side of the plunger 3 pushing against the cement is preferably domed to profile the ejection end of the chamber 1 to minimize wastage of cement.

The plunger 3 may be slidably inserted at either end of the cylinder 1 although the preferred embodiment is as described above.

The first embodiment includes a spring 15 which is compressed on the down stroke of the handle and assists

- 12 -

the reverse stroke. This is omitted in the second embodiment.

5 It is preferable to manufacture the cylinder, mixing mechanism and plunger from a fairly rigid plastic material, thus reducing the cost of the apparatus and providing a disposable mixer. The apparatus could, of course, be made from other materials e.g. lightweight metal.

- 13 -

Claims

1. A bone cement mixing apparatus comprising a mixing chamber, a mixing element rotatably mounted in said  
5 mixing chamber, and drive means for causing rotation of said mixing element, wherein said drive means comprises a handle axially movable relative to said mixing chamber, and a gear mechanism between said handle and said mixing element such that said gear mechanism translates axial  
10 movement of said handle into rotation of said mixing element.
2. A bone cement mixing apparatus comprising a mixing chamber, a mixing element rotatably mounted in said  
15 mixing chamber, and drive means including a handle for causing rotation of said mixing element, wherein said drive means is carried by a lid assembly of the chamber, and wherein the lid assembly and drive means are detachable from the chamber and from the mixing element  
20 thereby enabling reuse of the lid assembly and drive means with a different chamber and mixing element if desired.
3. The apparatus of claim 2 comprising air tight seals  
25 provided between the lid assembly and the mixing element and between the lid assembly and the chamber.
4. The apparatus of claim 2 or 3 wherein the drive means includes a gear mechanism between said handle and  
30 said mixing element such that said gear mechanism translates axial movement of said handle into rotation of said mixing element.
5. The apparatus of claim 1 or 4, wherein said gear  
35 mechanism comprises a barley twist mechanism wherein axial movement of said handle moves a threaded rod through a drive bush inducing a rotational force on said mixing element.

- 14 -

6. The apparatus as claimed in claim 5 and in claim 2 or 3 wherein the drive bush is detachably push-fit engaged with an axial shaft of the mixing element.
- 5 7. The apparatus of claim 6 including a rib and groove locating arrangement between the bush and shaft.
8. The apparatus of any preceding claim, wherein said mixing chamber forms the body of a dispensing syringe,  
10 said apparatus further comprising a nozzle adapted to be attached to one end of said chamber, the other end having a base arranged to move axially within said chamber under the force of a plunger to eject the mixed cement.
- 15 9. The apparatus of any preceding claim further comprising a stand releasably attached to the end of said chamber remote from the handle.
10. The apparatus of any preceding claim further  
20 comprising a slot in an end wall of the chamber substantially corresponding to the profile of the mixing element and through which said mixing element is withdrawn after mixing, whereby residual cement is scraped off said mixing element as it is withdrawn  
25 through said slot.
11. An orthopaedic bone cement mixing apparatus comprising a cylindrical syringe body defining a mixing chamber, a plunger slidably mounted at one end of the  
30 cylinder, a mixing member rotatably mounted in said chamber and drive means for causing rotation of said mixing member, wherein said mixing member includes a blade mounted on and radially extending from a rotatable shaft along the central axis of the cylinder such that  
35 rotation of said shaft causes said blade to rotate about the axis of the shaft within the interior of the cylinder, and wherein the blade extends from the shaft to the inner wall of the cylinder and is adapted and




- 15 -

arranged so that as the blade rotates it wipes out the whole of the cement containing part of the interior of the cylinder.

5 12. The apparatus of any preceding claim, further comprising means for creating a vacuum in said chamber.

10 13. A method of mixing bone cement in a mixing chamber, by a mixing element rotatably mounted in said chamber containing the material to be mixed; said method comprising axially moving a drive handle, relative to said chamber, wherein said handle is connected to said mixing element via a gear mechanism, such that axial movement of said handle is translated via said gear  
15 mechanism into rotation of said mixing element.

FIG. 1.

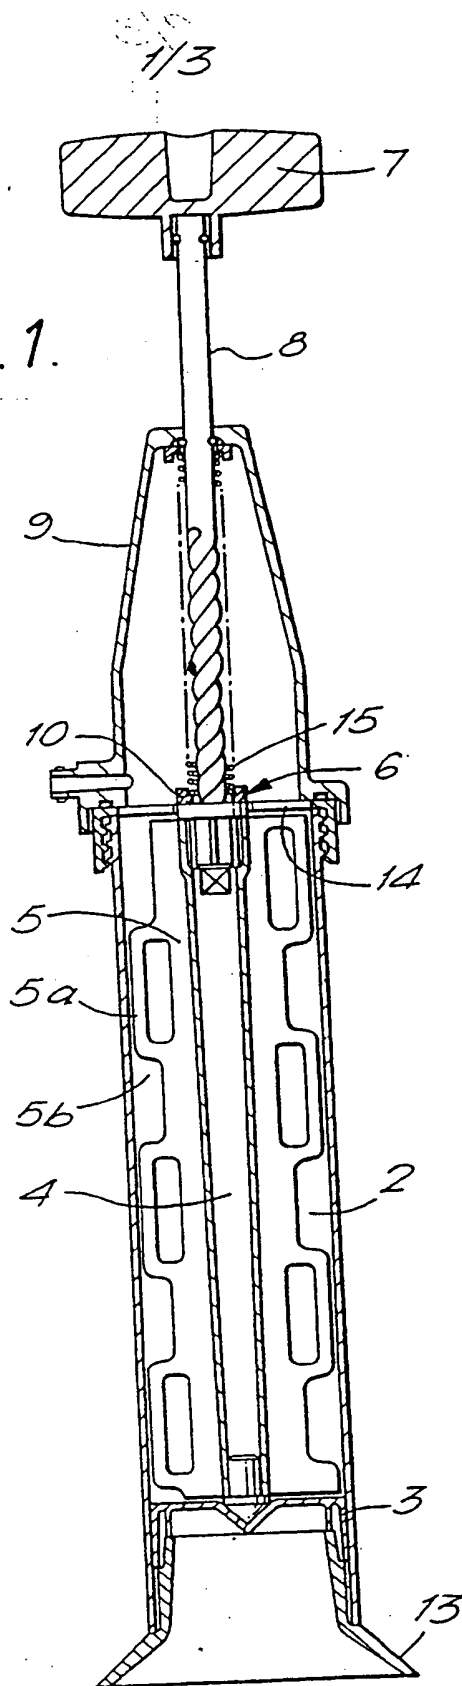



F/G.2.

3/3

FIG. 3.

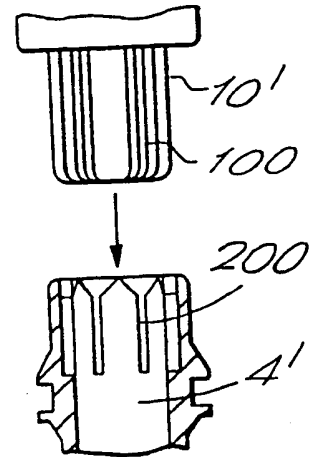
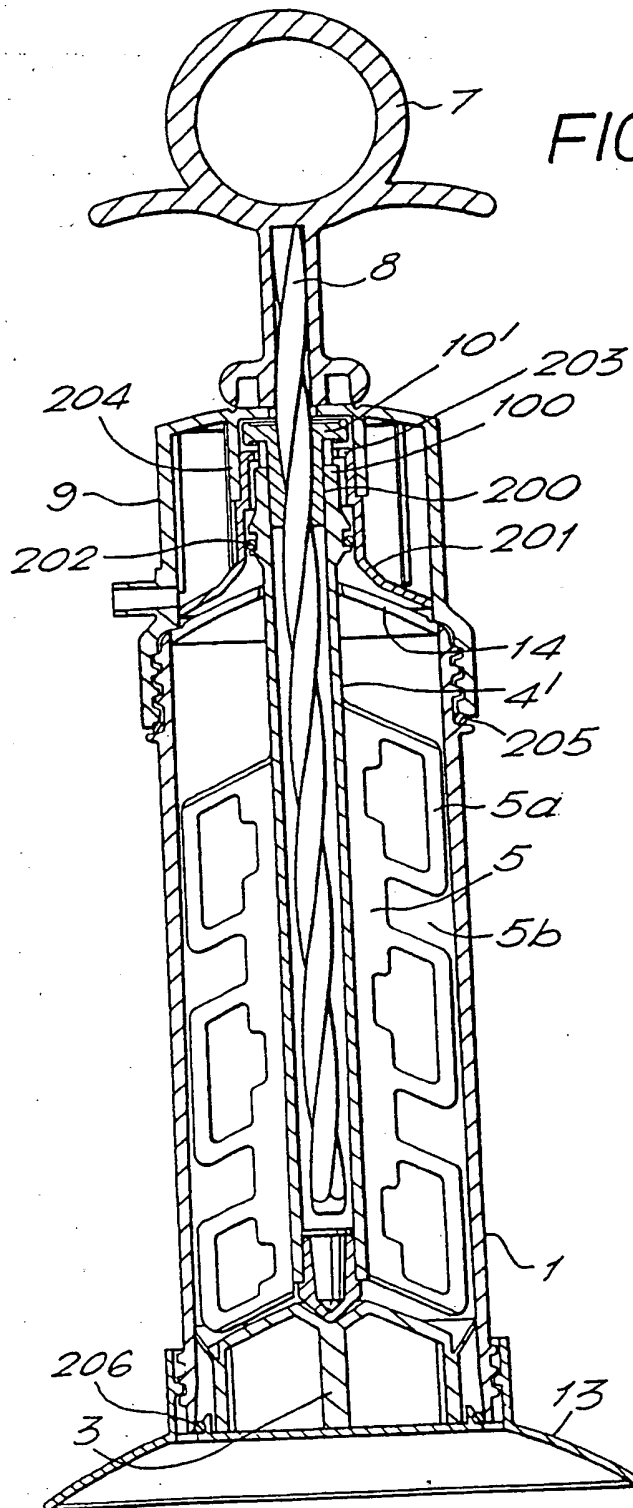


FIG. 3A.

# INTERNATIONAL SEARCH REPORT

Internati Application No  
PCT/GB 95/00365

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B01F13/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,3 115 664 (DEL PONTE) 31 December 1963	1-13
A	DE,C,883 326 (KOHLE) 16 July 1953	1-13
A	US,A,5 265 956 (NELSON) 30 November 1993	9,12
A	US,A,3 606 094 (MILLS) 20 September 1971	10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

- \* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* "&" document member of the same patent family

Date of the actual completion of the international search

6 April 1995

Date of mailing of the international search report

20.04.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Peeters, S

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/00365

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3115664	31-12-63	FR-A- 1318199	10-05-63
DE-C-883326		NONE	
US-A-5265956	30-11-93	US-A- 5344232	06-09-94
US-A-3606094	20-09-71	NONE	